
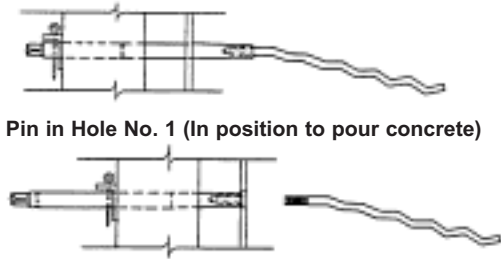



ONE SIDED FORMING - OFF CONCRETE

TYPICAL CANTILEVER FORMS

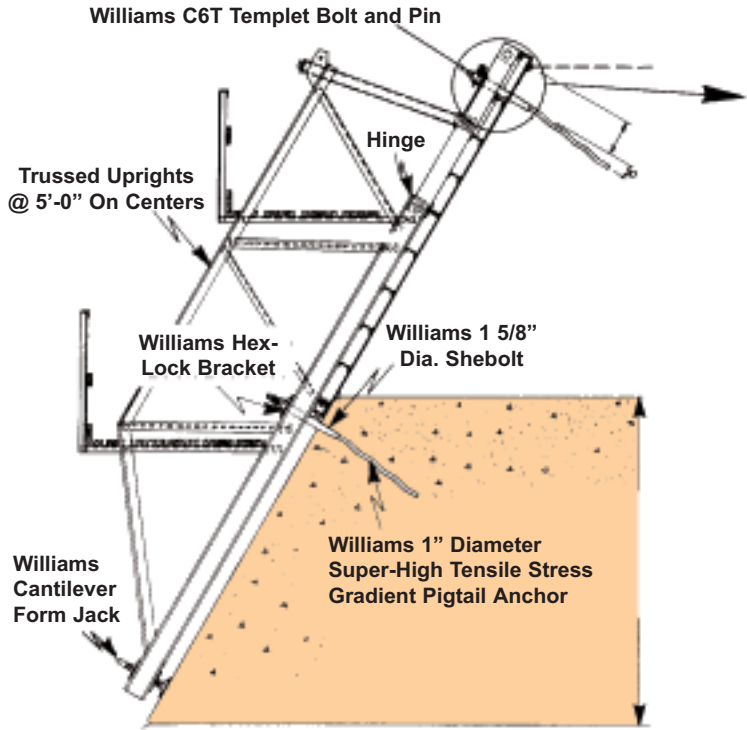

Pin in Hole No. 1 (In position to pour concrete)

C6T TEMPLET BOLT

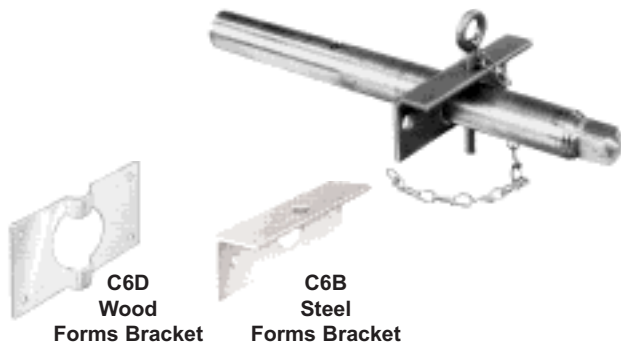

C6D Wood Forms Bracket


C6B Steel Forms Bracket

WHEN ORDERING STATE:

- Form Grip/or Pin Hole Locations
- Type of Bracket
- Pin and Chain

WILLIAMS templet bolts offer a convenient and inexpensive method of placing PIGTAIL anchors in cantilever forming. These bolts have factory-drilled holes to secure quick placement. Templet bolts are available in the same standard diameters as WILLIAMS SHEBOLTS and have matching tapers. Standard lengths from 18" to 30". Other sizes on request. Bracket available for wood or steel forms.

FORMING OFF EXISTING CONCRETE

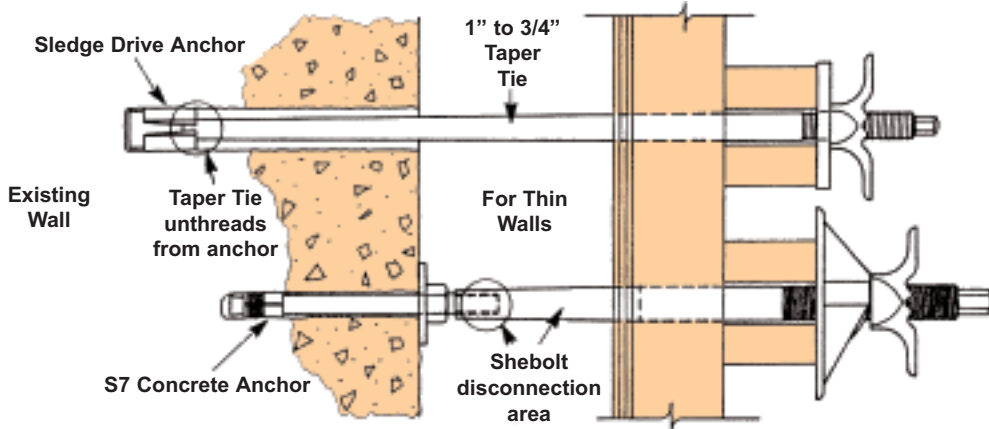

For Removal
Taper Tie unthreads from anchor assembly.

Shebolt is unthreaded from S-7 anchor.

For further information consult Williams Refacement Manual.