


# LIGHT TIE-THRU FORMING



## A25 SOCKET FOR WRENCH HEAD SNAP-TIE



Socket fits most standard ratchet wrenches with a 3/8" drive. After fitting socket over wrench head, socket must be turned 1/4 to 1/2" to break tie.

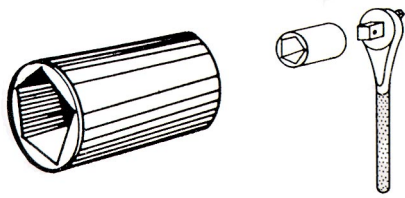

## A26 SNAP-TIE WRENCH

The snap-tie wrench is used to break ties after formwork is stripped.


1. Apply wrench to tie shank at base of concrete.
2. With wrench against concrete, bend tie to an approximate 90-degree angle.
3. Rotate tie in clockwise direction to break tie off.

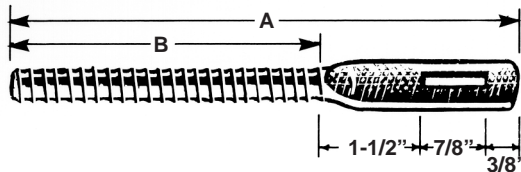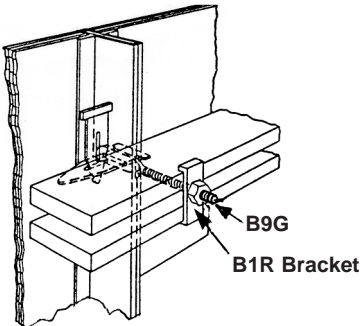

## B9G SLOTTED COIL BOLT

Used when attaching strong-backs to modular type of forms.

Dia.	A	B
1/2" (12mm)	9" (229mm)	6-1/4" (165mm)
1/2" (12mm)	11" (279mm)	8-1/4" (210mm)
1/2" (12mm)	15" (225mm)	12-1/4" (311mm)

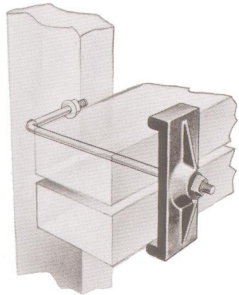


## F1D-01 L-ROD WALER SUPPORT

For Heavy Duty Applications

BIR (2"x 4", 2"x 6" or 2"x 8" walers)  
BIL (3"x 4", 3"x 6" or 3"x 8" walers)

Available with 3/8" or 1/2" L-Rods  
Preferred method when forms are lifted.

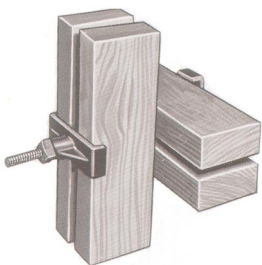


## F1Z STRONGBACK FORM ALIGNER CLAMPS

Using Vertical Strongbacks for alignment outside regular walers.


Recommended for all forms higher than 12'.

State strongback and waler sizes.

Special sizes on request.


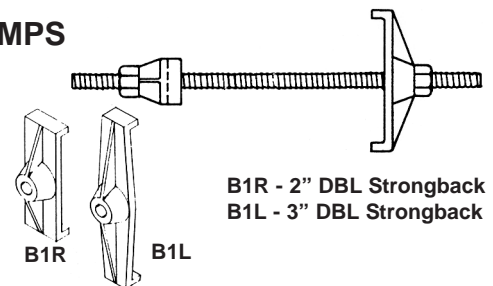


B1R - 2" DBL Strongback  
B1L - 3" DBL Strongback

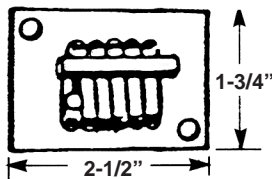

## F2E COIL WALER HOLDER

Used for quick attachment of walers to studs on light form applications. Designed for use with 1/2" diameter coil bolts. Shear capacity of nails used determines working load.

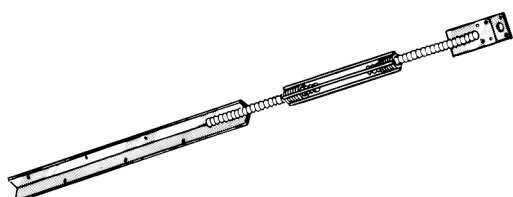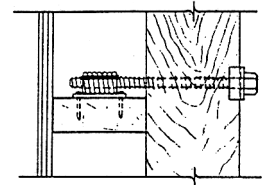

## F8Z FORM ALIGNER BRACE

Williams Form Aligner Brace features a turnbuckle unit with 1" coils for fast, easy form adjustment. Special anchoring plate designed to suit two different applications. A 15/16" diameter hole for stake or anchor, or nail holes for wood stakes are provided.